




— Pharma Process & Packaging

www.saintyco.com


EcoTab-35D

Tablet Press

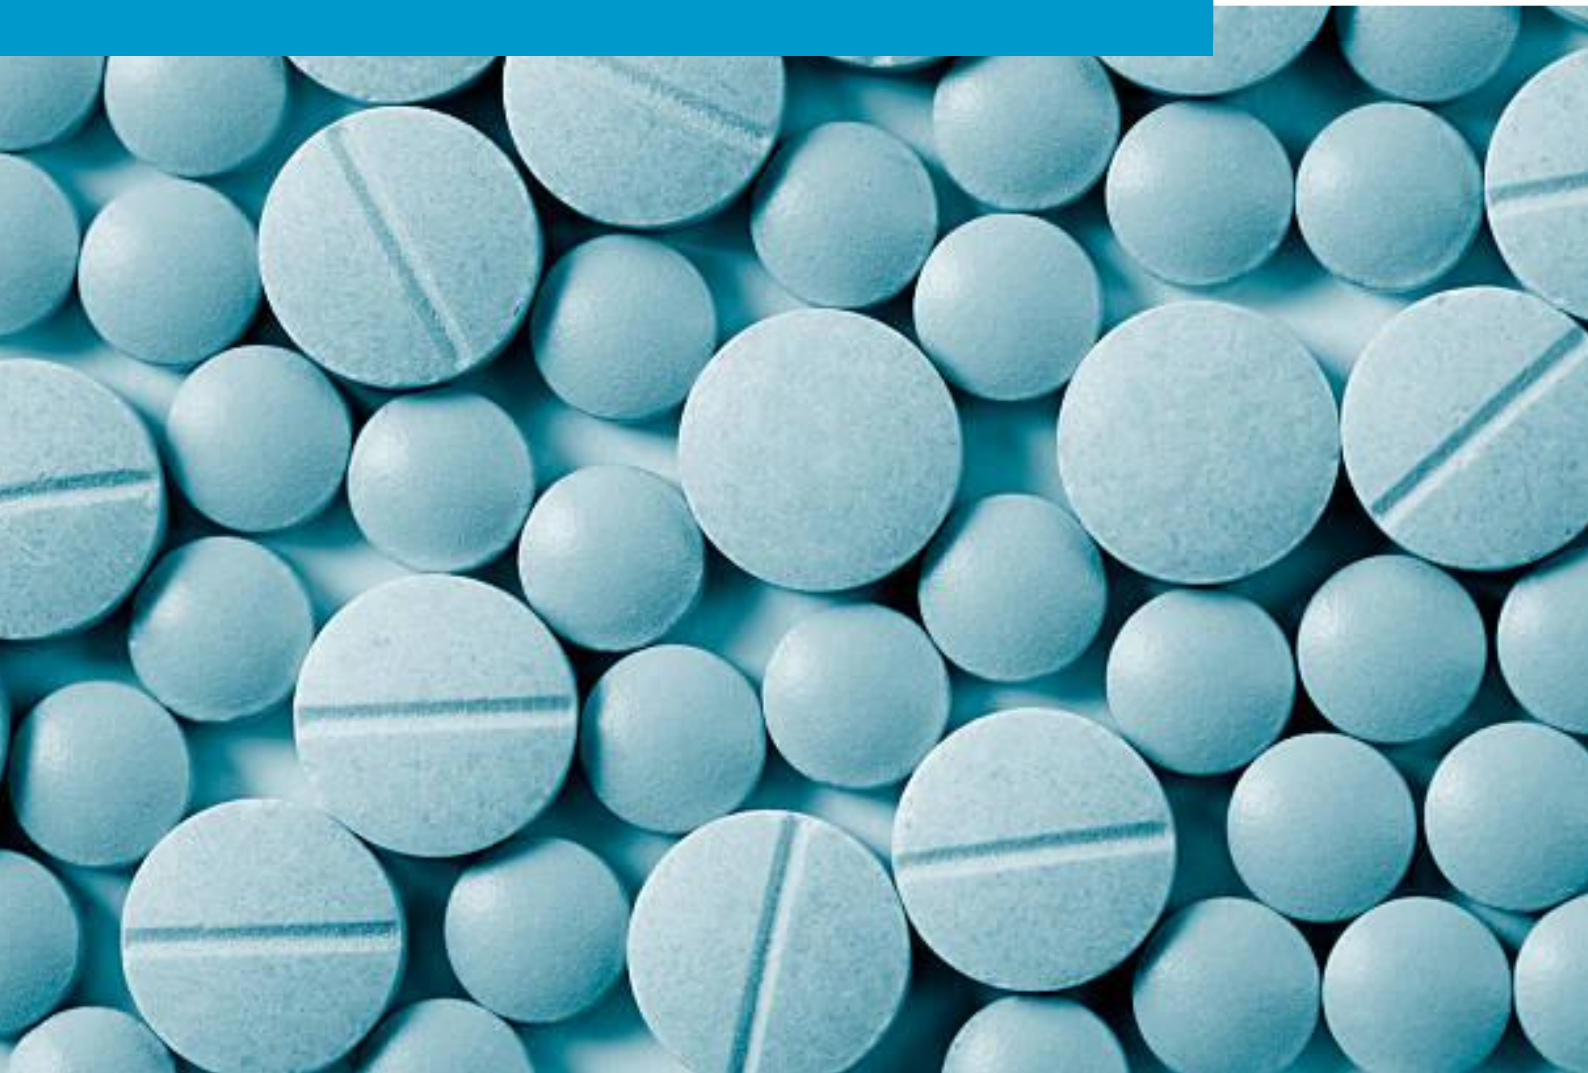

EcoTab-35D

Tablet Press

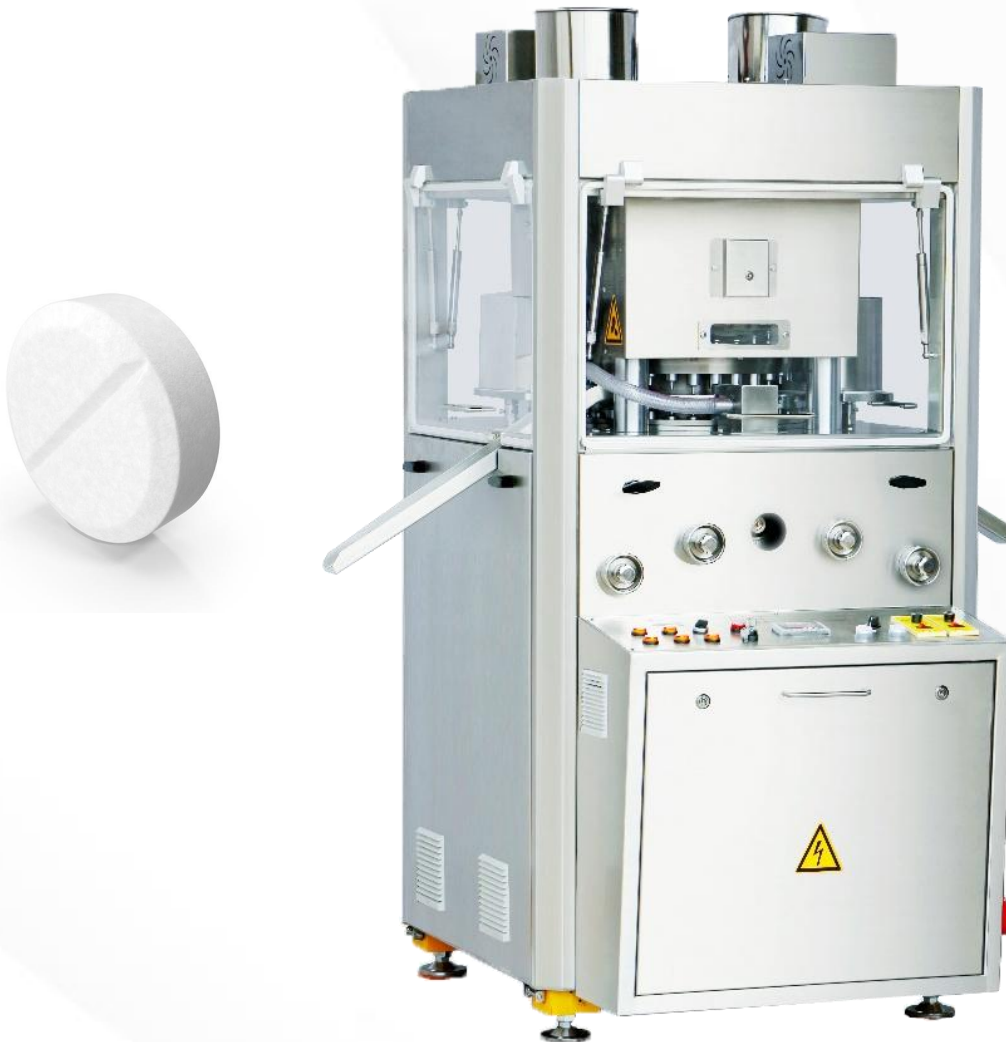

The **EcoTab-35D** is a double-pressing automatically revolving piece-pressing machine which could make grain be pressed to be round piece, be carved characters, special shapes and double color piece prescription.

It is applicable not only to the pharmaceutical and foodstuff industry, but also to the chemical, electronic and battery industry for pressing the various kinds of granular materials into tablets.






“

We're Different,
We've Always Been
Different!”

EcoTab-35D includes many standard features, increasing performance and reliability:

- Peripheral casing is closed form which is made of all stainless steel , internal mesa adopt stainless steel material, it can keep the surface glossy and prevent cross contamination and meet GMP requirement.
- It is equipped with organic glass and visual window, visual tablet state, all of the side plate can turn on and clear up and maintenance is easy.
- All controller and operating parts are rational layout.
- It is equipped with variable frequency speed control device for electrical control, convenient operation, steady running, it is safe and accurate.
- It is equipped with overload protection device, when pressure overload, it can stop automatically.
- Transmission system is sealed on the main tank below, is a safe separation of independent components, also has no cross pollution, and transmission of infiltration in the oil pool, easy to has heat output and also it is wearable.
- It is equipped with powder absorbing device , can absorb indoor dust .
- Wearing parts like orbit, feeder, hopper, drive worm, powder taking equipment and it has general structure with **EcoTab** type product, it is helpful for standardization, generalization and seriation.
- **Optional oil pan, dust ring and automatic lubrication system.**
- **Optional HMI.**

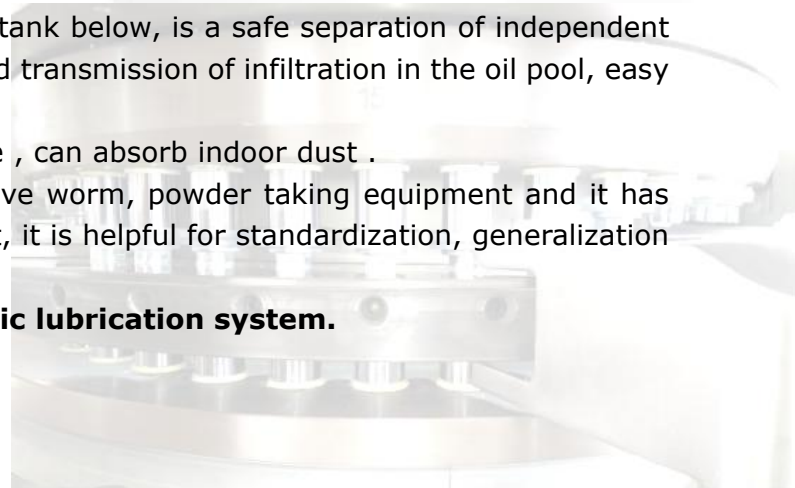

Technical Data	EcoTab-35D
Number of P/D	35 units
Maximum Compression	100 kN
Max. Thickness of Tablet	6 mm
Maximum Depth of Filling	35 mm
Maximum Diameter of Tablet	13 mm
Rotary Speed	147000 r/min
Maximum Capacity (layered)	38,400 T/hr (single)
Power of Motor	5.5 kW
Area to be Occupied	1240 x 980 x 1650mm
Weight	1950 kg

SaintyCo Also Offer:

- Tablet Compression Solutions
- SoftGel Systems
- Coating Systems
- Cartoning Systems

For additional information, please drop E-mail to info@saintyco.com

